



SUPA RICH

EMERGENCY LIGHT



EML-SP 12-7
EML-SP 12-5



EML-SP 6-5



EML-CTB-SP 12-7
EML-CTB-SP 12-5



EML-EXS-SP



www.suparich.co.th



TIS 1955-2551



SUPA RICH CO.,LTD

Email: eml@suparich.co.th

27 Ramintra Soi 48 , Ramintra Road ,
Ramintra , Khannayao , Bangkok 10230
Tel : +66-2509-4438 Fax : +66-2509-4088


EMERGENCY LIGHT



MODEL: EML - SP 12-7
MODEL: EML - SP 12-5



MODEL: EML-SP 6-5

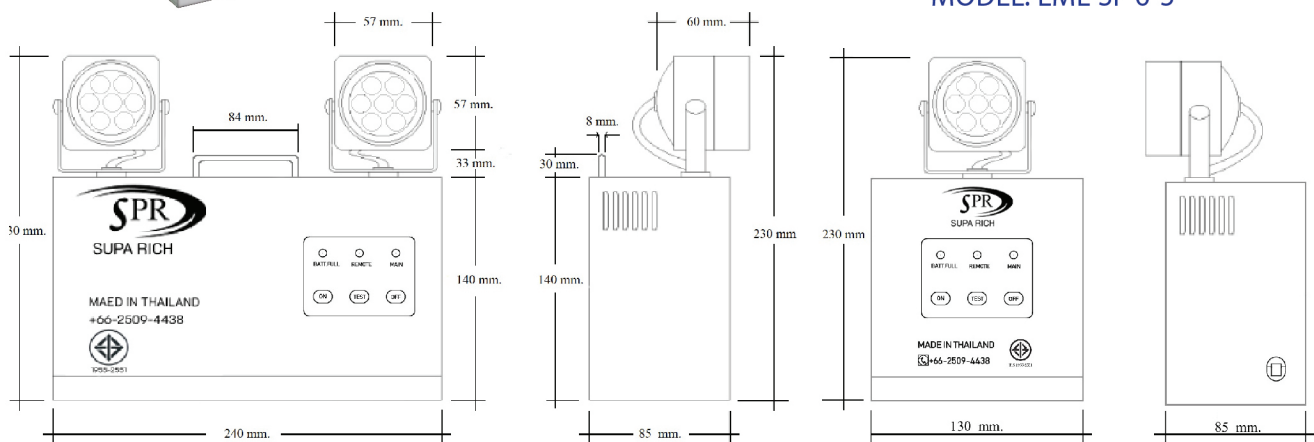


Specification	MODEL: EML-SP 12-7	MODEL: EML-SP 12-5	MODEL: EML-SP 6-5
Mode of operation	Non-Maintained	Non-Maintained	Non-Maintained
Input Voltage	AC 220 Volt 50Hz	AC 220 Volt 50Hz	AC 220 Volt 50Hz
Lamp	LED 2x9W (Constant Power)	LED 2x9W (Constant Power)	LED 1x7W(Constant Power)
Battery	Sealed lead acid battery	Sealed lead acid battery	Sealed lead acid battery
Battery size	12 Volt 7.5 Ah	12 Volt 5 Ah	6 Volt 5 Ah
Back up time	5 hours (in 12 month) 2hours(in 2 year)	3 hours (in 12 month) 2hours(in 2 year)	2 hours (in 12 month)
Battery charging method	Two-steps voltage charging	Two-steps voltage charging	Constant voltage charging
Charging current	Limits current 450mA	Limits current 450mA	Limits current 350mA
Charging time	12-18 Hrs.	12-18 Hrs.	10-16 Hrs.
Construction	Electro galvanized steel case epoxy power coated	Electro galvanized steel case epoxy power coated	Electro galvanized steel case epoxy power coated
Protection	AC fuse, DC fuse, Low voltage cut off to prevent battery over discharge	AC fuse, DC fuse, Low voltage cut off to prevent battery over discharge	AC fuse, DC fuse, Low voltage cut off to prevent battery over discharge
Indicators	LED MAIN, LED CHARGE, LED BATT.FULL	LED MAIN, LED CHARGE, LED BATT.FULL	LED MAIN, LED CHARGE, LED BATT.FULL
Switch	Push button "ON / OFF" control lamp (Emergency only)	Push button "ON / OFF" control lamp (Emergency only)	Push button "ON / OFF" control lamp (Emergency only)
Manual test	Push button Switch "TEST"	Push button Switch "TEST"	Push button Switch "TEST"
Weight	4.4 kg	3.95 kg	2.9 kg

CENTRAL BATTERY



MODEL: EML-CTB-SP 12-7
MODEL: EML-CTB-SP 12-5

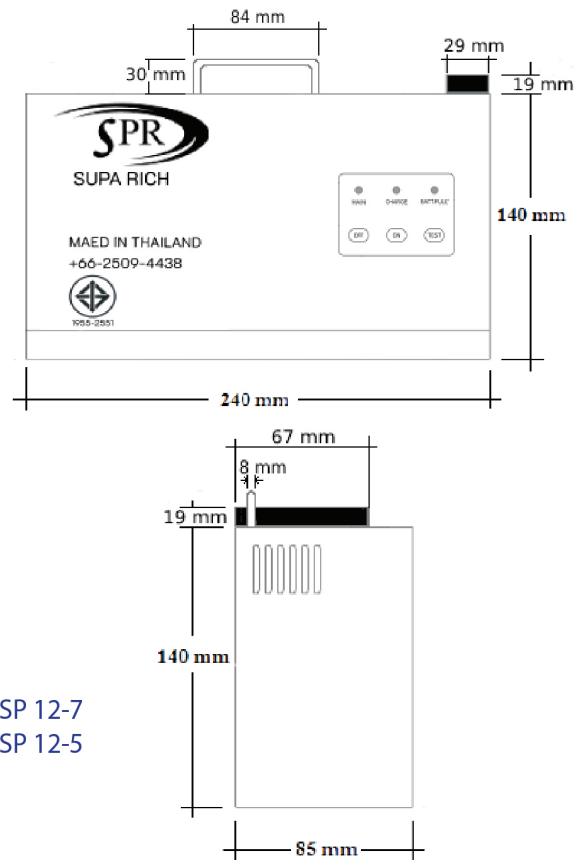

SPECIFICATION	MODEL:EML-CTB-SP 12-7	MODEL:EML-CTB-SP 12-5
Mode of operation	Non-Maintained	Non-Maintained
Input Voltage	AC 220 Volt 50Hz	AC 220 Volt 50Hz
Load Max	60 Watt	40 Watt
Battery	Sealed lead acid battery	Sealed lead acid battery
Battery size	12 Volt 7.5 Ah	12 Volt 5 Ah
Back up time	30 Watt/Back up time 3 hours	20 Watt/Back up time 3 hours
Battery charging method	Two-steps voltage charging	Two-steps voltage charging
Charging current	Limits current 450mA	Limits current 450mA
Charging time	12-18 Hrs.	12-18 Hrs.
Construction	Electro galvanized steel case epoxy power coated	Electro galvanized steel case epoxy power coated
Protection	AC. Fuse, DC. Fuse, Low voltage cut off to prevent battery over discharge	AC. Fuse, DC. Fuse, Low voltage cut off to prevent battery over discharge
Indicators	LED MAIN, LED CHARGE, LED BATT.FULL	LED MAIN, LED CHARGE, LED BATT.FULL
Switch	Push button ON / OFF control lamp (Emergency only)	Push button ON / OFF control lamp (Emergency only)
Manual test	Push button Switch TEST	Push button Switch TEST
Weight	4.2 kg	3.75kg

EMERGENCY EXIT SIGN



MODEL: EML-EXS-SP

MODEL : EML-EXS-SP	
Mode of operation	: Maintained
Input Voltage	: AC 220 Volt 50Hz
Lamp	: LED 10W
Battery	: Nickel metal hydride battery
Battery size	: 4.8Volt 2.1 Ah
Back up time	: 2 hours
Battery charging method	: Constant charging
Charging time	: 12-18 hours
Charging current	: Limits current 110mA
Construction	: Electro galvanized steel case epoxy power coated
Protection	: AC fuse, DC fuse
Indicators	: LED MAIN, LED CHARGE, LED BATT.FULL
Switch	: Push button " ON / OFF " control lamp (Emergency only)
Manual test	: Push button Switch " TEST "
Weight	: 1.75 kg