




Door Closers







**Passed test of
500,000 cycles.**



**High Quality
Product**

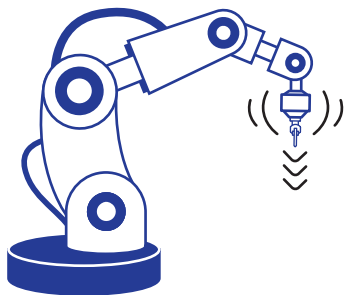

**High Level
Manufacturing
Technology**

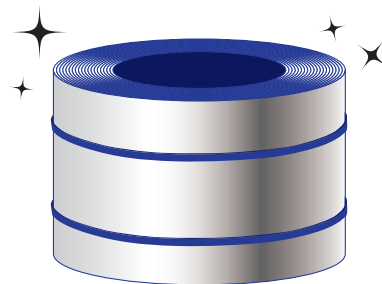

**Stainless Steel
Decorative
Hardware**



T-18A

Single Floor Spring


Technical Information

- Suitable Door Weight _____ 90kg.
 Type _____ Light Machine Single Cylinder
 Suitable door width _____ $\leq$ 850mm.
 Location degree _____ 90° 120°
 Changeable Spindle _____ ✗
 Double action door _____ ✓
 2 stage adjustment speed _____ ✓

Left and right, forward and backward, up and down can be adjusted 6mm.

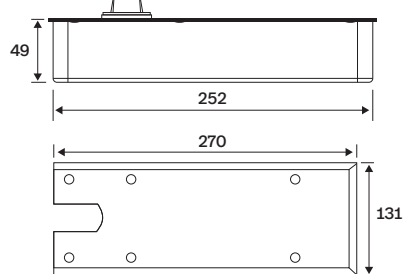

Dimension (mm.)

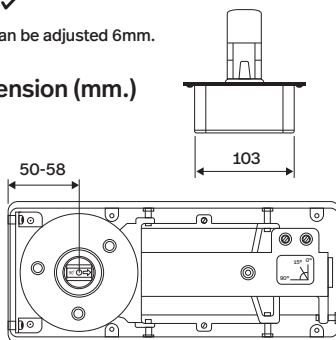



T-80

Single Floor Spring



Technical Information

- Suitable Door Weight _____ 300kg.
 Type _____ Heavy Duty Machine Cylinder
 Suitable door width _____ $\leq$ 1500mm.
 Location degree _____ 90° 180°
 Changeable Spindle _____ ✓
 Double action door _____ ✓
 2 stage adjustment speed _____ ✓

Left and right, forward and backward, up and down can be adjusted 6mm.

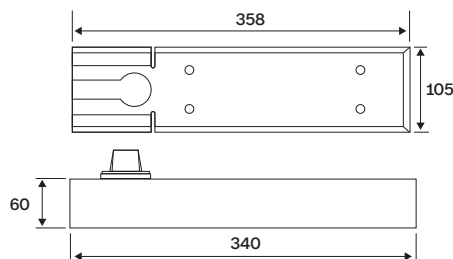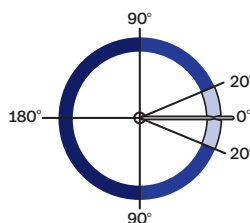

Dimension (mm.)

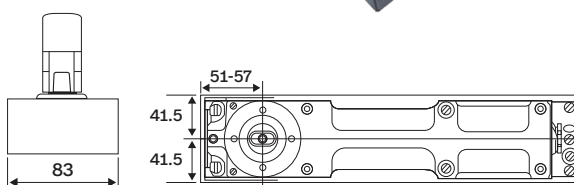

A = 3mm



T-84

Double Cylinder hydraulic floor spring



Technical Information

- Suitable Door Weight _____ 150kg.
 Type _____ Ultra-thin Machine Two Cylinder
 Suitable door width _____ $\leq$ 1200mm.
 Location degree _____ 90° 120°
 Changeable Spindle _____ ✓
 Double action door _____ ✓
 2 stage adjustment speed _____ ✓

Left and right, forward and backward, up and down can be adjust 6mm.

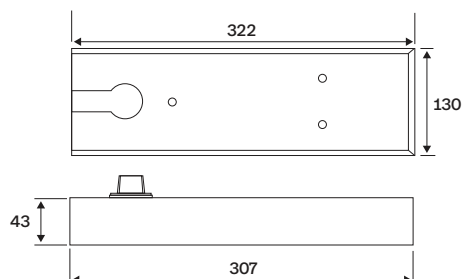

Dimension

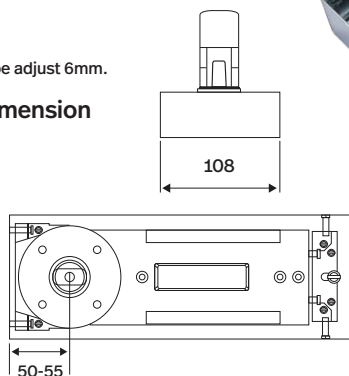

A = 3mm



27 Ramintra Soi 48, Ramintra Road, Ramintra, Kannayao Bangkok 10230

Tel : +66-62-624-2516 Fax : +66-25094088 ID Line : @sigmathai

Email : info@sigmathai.com Website : www.sigmathai.com